



OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

TENDER CALL NOTICE

3509
Advt. No. . / Cvil / ,Bls. Of 2023-24.

Date. _]8/7/2023.

1.The **Block Development Officer, Jaleswar Block, Balasore** on behalf of the Governor of Odisha invites **Sealed Tenders (percentage Rate)** in conformity with the DTCN, are invited from the **"B" & "A" and "D" & "C" Class Contractors** registered with State Govt. And Contractors of equivalent grade/class registered with central Govt. MES/Railways for Execution of **Civil Works for of Rs. 12.18 lakhs** under Panchayat Samiti, Jaleswar, Balasore. The Tender Documents (**DTCN & BOQ**) and Detailed List of works mentioned, Annexure – I, can be obtained from District **NIC Website (www.balasore.nic.in)** from **Dated: 18.07.2023 to 31.07.2023 till 5PM.**

2.The Tender documents (**DTCN & BOQ.**) duly signed by the contractors should be accompanied with the self attested photo copy of **Valid Registration Certificate (Contractor Licence), valid GST clearance certificate and PAN Card** with requisite EMD amounts specified against each work in shape of NSC/POTD/KVP/POSB/Fixed Deposit duly pledged in favour of **BDO, Jaleswar Block, Balasore.** The tender must be accompanied with **AFFIDAVIT** regarding authentication of Documents and Credentials.

3. The Tender documents (**DTCN & BOQ.**) Should be accompanied with requisite **Tender paper Cost in shape of Bank Demand Draft drawn in favour of BDO, Jaleswar Block, Balasore, payable at Balasore,** from any Nationalised Bank. The Cost of the Tender paper mentioned against the work.

4.The sale Tender Paper will be Received up to date : **31.07.2023 till 5 P.M.** and addressed to The **BDO, Jaleswar Block, Balasore** through **Speed post/Registered post/courier only.** The tender must be subscribed name of the work on top of the sealed envelope.

5.The tenders are scheduled to be opened on Dt. **01.08.2023 at 10.30 A.M.** at the Office of **BDO, Jaleswar Block, Balasore,** in presence of the Tenderers or their authorised representatives. No adjustment of Tender per Cost (Non-refundable) and EMD will be entertained in any manner.

6. The detailed Terms and conditioned List of works (DTCN and BOQ) can be downloaded at District **NIC Website (www.balasore.nic.in).**

7. The incomplete bid in any form liable for rejection. The undersigned reserve the right to cancel the tender without assigning any reason thereof.

P. Rout
18. 07. 23
BDO, Jaleswar Block,
BALASORE





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

Memo No: 3570

Date: 18.7.23

Copy submitted to The Collector and District Magistrate, Balasore for favour of kind information.

P. Rout
18.07.23
BDO, Jaleswar Block,
Balasore

Memo No: 3571

Date: 18.7.23

Copy forwarded to The CDO-cum-EO,ZP , Balasore/ DWO, Balasore/ Executive Engineer R&B(Div.-I&II)/ Executive Engineer RWD(Div.-I,II,& Jaleswar) /Executive officer Jaleswar Municipality for favour of kind information and necessary action and request them to display in Office Notice Board for wide circulation.

P. Rout
18.07.23
BDO, Jaleswar Block,
Balasore

Memo No: 3572

Date: 18.7.23

Copy to the Editor of The _____ and _____ Balasore & they are requested to publish in the daily news in early date with minimum size (8 point letter) in length and width of the advertisement.

P. Rout
18.07.23
BDO, Jaleswar Block,
Balasore

Memo No: 3573

Date: 18.7.23

Copy to District Informatic Officer, NIC ,Balasore for information and requested to publish in district web site portal for wide circulation.

P. Rout
18.07.23
BDO, Jaleswar Block,
Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

Detailed Tender Call Notice 2023-24 (Annexure-A)

Sl. No.	Name of the Work	Estimated Cost (in Rs.) Without GST.	EMD @ 1% in Rs.	Cost of Tender Paper (in Rs.)	Period of Completion & Class of Contractor	Availability of Tender Documents (DTCN&BOQ)
1	2	3	4	5	6	7
1	Construction Of New ICT & Smart Learning Facility Centre	12,18,794/-	12,200.00	2500.00	6 Months ("B" , "A", "C" & "D")	The Tender Documents (DTCN&BOQ) may be obtained from NIC website (www.balasore.nic.in) from 18.07.2023 to 31.07.2023.

P. Rout
18.07.23
BDO, Jaleswar Block,
Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

**PANCHAYAT SAMITI, JALESWAR BLOCK
BALASORE**

DETAILED TENDER CALL NOTICE FOR BUILDING WORKS

NAME OF THE WORK:- Construction Of New ICT & Smart Learning Facility Centre at Kabatghati Govt. High School under Jaleswar Block.

ESTIMATED COST: - Rs. 12,18,794.00 (Fill up the place and cost as per Annexure-1)

1. Sealed tenders are invited from the registered "B"&"A" and 'D'&'C' Class contractor of P.W.D. / C.P.W.D./ M.E.S. / Railway in prescribed form to be eventually drawn in P.W.D. Form P-1 and will be received by The Office of the BDO,Jaleswar Block, Balasore , up to 5.00 P.M. Date : 24 /07 /2023 for the works and will be opened by the BDO,Jaleswar Block, Balasore in the presence of the tenderers or their authorized agents at 10.30 A.M. on Date : 25 /07/2023. The amount of estimate is approximately of Rs. 12.18 Lakhs
2. The tenderers should please note that the work will have to be completed within 03 (Three) Months commencing from the date of issue of work order.
3. Tenderers are required to pay earnest money Deposit of 1% (One Percent) of estimated amount In shape of **NSC/POTD/KVP/POSB/Fixed Deposit** duly pledged to BDO,Jaleswar Block, Balasore, otherwise their tender will not be considered. The earnest money will be refunded to the unsuccessful tenderers on application as per the term and conditions laid down in O.P.W.D. Code and the same will be retained in case of successful tenderers and will not carry any interest.
4. a) The plan & specifications for the work can be seen at Civil Engineering section in Office of the BDO,Jaleswar Block, Balasore, during working hours and days. Complaints at a future date that the plan and specifications have not been seen can not be entertained. The Contractor may obtain a set of tender documents with DTCN and detail list of the works by down load from district web site www.balasore.nic.in on 14 /07/2023 to 24/07/2023 up to 5P.M.
b) The amount of tender paper cost mentioned in list to be attached with the tender schedule in shape of **Bank Draft** in the name of BDO,Jaleswar Block, **Balasore**, payable at **Balasore** in any nationalized bank, this amount is not refundable. Tender must be submitted in a sealed cover. The name of the work is to be noted on the cover. Without cost of the tender paper the tender will reject.

Signature of the Contractor

P. Rout
18 . 07 . 23
BDO, JALESWAR BLOCK, Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore

E-mail: ori-jaleswar@gmail.com

c) All other information's can be obtained on application to the BDO, Jaleswar Block, Balasore.

d) This Office will not be held responsible if there is any delay in receipt tender documents by the intending contractors sent is the deptt. Through registered post/ Speed post/ Courier & similarly if the tender documents sent by the intending contractor through registered post do not reach in Office by the shedule date and time. Their offers will not be considered on any account even if the tender documents were dispatched by the tenderers before due date.

5. The BDO, Jaleswar Block, Balasore, Balasore reserves the right to reject any or all the tenders received without assigning any reasons thereof.
6. The tender whose tender is selected for acceptance shall within a period of seven days upon written intimation being given to him of acceptance of his tender make an initial security deposit of another 1% (One Percent) of Estimated Cost. So that the earnest money and initial security deposit will be total 2% (Two Percent) of the tendered amount as shown in clause 3 above and sign the agreement in the P.W.D. Form No. P-1 (Schedule XLV No. 61) for the fulfillment of the contract in the office of the BDO, JALESWAR BLOCK, Balasore.

The security deposit, together with the earnest money and the amount with – held according to the provisions of P-1 agreement shall be retained as security deposit for the due fulfillment of this contract. Failure to enter into the required agreement and to make the security deposit as above shall entail forfeiture of the earnest money.

No tenderer shall be finally accepted until , the required amount or security money is deposited. The written agreement to be entered into between the Contractor and Government shall be the foundation of rights of the parties and the contract shall be deemed to be incomplete until the agreement has first been signed by the contractor and then by the proper officers authorized to enter into the contract on behalf of the Govt. The department will accept the security deposit in the form of **NSC/POTD/KVP/POSB/Fixed Deposit** duly pledged to the BDO, JALESWAR BLOCK, Balasore and in no other form. The acceptance of less quoted rates of tenderer to be deposited diffential amounts from the estimated amounts during the agreement period in shape of as mentioned above as for ISD.

7. The Percentage rates of schedule of Less should be quoted in words and figures in percentage basis at the end of the BOQ mentioned and the excess percentage rates will not be accepted and this will consider for schedule of rates for execution of the agreement if this will found lowest. Otherwise the tender will be liable for rejection. In case of discrepancies between words and figures. The words shall prevail. The tender shall be written legibly and free from erasures, overwriting or correction of figures, Correction, where unavoidable should be made by scoring out, initialling, dating and rewriting.

Signature of the Contractor

P. Rout
18 . 07 . 23
BDO, JALESWAR BLOCK, Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore

E-mail: ori-jaleswar@gmail.com

8. The contractors will be responsible for payment of all royalties or other charges for quarrying materials. All local taxes inclusive of State Sales tax, GST & Income Tax, Ferry and Tollage charges are to be paid by the Contractor.
9. The tender may not, at the discretion of the competent authority be considered unless accompanied by attested copies of GST clearances certificates, Income tax clearance Certificate/ PAN and Registration Licence, as the case may be and the original certificate/ documents to be produced before the BDO, JALESWAR BLOCK., Balasore at the time of opening of the tender/ drawl of agreement.
10. The contractor shall be fully liable to indemnify the department for payment of any compensation under 'workman' compensation Act VII of 1923, on account of the workmen being employed by him and the full amount of compensation paid will be recovered from the contractor.
11. Every tenderer must examine the detailed specification of Orissa before submitting his tender. This right is reserved without impairing the contract to make such increase or decrease in the quantities or items of work mentioned in the schedule attached to the tender notice as may be considered necessary to complete the work fully and satisfactorily. Such increase or decrease shall in no case invalidate the contractor's rates. It shall be definitely understood that the Government do not accept any responsibility for the correctness of the quantities shown in the schedule. The schedule is liable to alteration by omission, or additions or deductions & it shall in no case invalidate the contract and no extra monetary compensation will be entertained.
12. All reinforced cement concrete work should confirm to Orissa Detailed Standard Specification & should be of 1:1.5:3 having minimum compressive strength in work test of 200 kg Cm² in 15 Cm. Cubes at 28 days after mixing and tests conducted in accordance with I.S.- 456 and 516 using 12 mm, to 20 mm. Size hard black broken granite chips (20mm size not to exceed 25%).
13. Shuttering and centering shall be with seasoned Non-sal wood planks and the inside of which shall be lined with suitable sheeting and made leak proof and water tight or alternatively steel shuttering and centering may be used.
14. The contractor shall make all arrangements for proper storage of materials, but no cost for raising shed for the storage of materials and pay of watchmen etc will be borne by the Department. These are also to be borne by the contractor. The Department is not responsible for considering the theft of materials at site. It is contractor's risk. Under any such plea if the contractor stops the work, he shall have to pay the full penalty as per clauses of the P-1 contract.

Signature of the Contractor

P. Rout
18.07.23
BDO, JALESWAR BLOCK, Balasore



OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore

E-mail: ori-jaleswar@gmail.com

15. For the purpose of jurisdiction in the event of dispute if any contract should be deemed to have entered into within the State of Odisha and it is agreed that neither party to the contract nor the agreement will be competent to bring a suit in regard to the matters covered by this contract at any place outside the state of Odisha.
16. After the work is finished all surplus materials and debris are to be removed by the contractor and preliminary work such as vats, mixing platform etc. are to be dismantled and all the materials are to be removed from the site. The ground up to 30m. (100') wide from the building should be cleared and dressed. No extra payment will be made to the contractor on this account The rate quoted should be inclusive of all these items.
17. The contractor shall not interfere with the execution of water supply or electrical fittings arrangement and any other works entrusted to any other agency by the department at any time during the progress of the work.
18. The department will have the right to inspect the scaffolding and centering made for the work and can reject partly or fully such structures if found defective in their opinion.
19. The contractor will have to arrange for water supply for all works and make sanitary arrangements for night work whenever necessary at his own cost.
20. Bailing out of water from the foundation either rain water or subsoil water if necessary should be borne by the contractor, No payment will be made for bench marks. Level pillars, profiles and benching and leveling ground where required. The rates quoted should be for finished items of work inclusive of these incidental of work.
21. All the quantities mentioned in the schedule are combined for ground floor and multi floors, in case of multistoried building s the rates should be through for the same.
22. Cement concrete in roof slab, beams etc. whenever prescribed by the Engineer-in- charge shall be machine mixed and vibrated and the contractor should arrange his own mixers, concrete vibrators, pumps etc. for the purpose.
23. It should be understood clearly that no claims, what – so – ever will be entertained in regard to extra items of works of extra quantity of any items besides estimated amount. A written order must be obtained from the BDO, JALESWAR BLOCK. Balasore and rates settled for the extra items of works or extra quantity of any item of work according to clause 11 of P-1 contract. The rates for any time not covered in the Agreement will be arrived on derivation from the rate of same class of item of work with any different specification provided in the agreement with addition or subtraction of corresponding cost of materials. In case, rate cannot be derived from the agreement the same will be arrived or derived from the schedule of rates in vogue at the time of actual execution of that item of work.

Signature of the Contractor


BDO, JALESWAR BLOCK, Balasore



OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

24. The tenderer shall have to abide by the C.P.W.D. Safety code rule introduced by the Government of India Ministry of works, Housing and Supply in their standing orders No. 44 to 50 dated 25.11.57.
25. Tenderers are required to abide by the fair wage clause as introduced by the Government of Orissa, works Department No. CA VIIIIR, 18/52-55 dt. 26.2.55 and No. IIM 56/6-28842 dt. 27.9.61 in case of any complaint by the labourers working about the non-payment of less payment of his wages as per minimum wages act. The BDO, JALESWAR BLOCK., Balasore will have the right to investigate and if contractor is found to be in default, he may recover such amount from the dues of the contractor and pay the due amount to such labour directly under intimation to the local labour officer and the Government and the decision of the BDO, JALESWAR BLOCK., Balasore will be final and binding on the Contractor.
26. The contractor will be responsible for the loss or damage of any departmental materials/equipment's clause 13/30 during execution of the work due to reasons what-so-ever and the cost of such materials will be recovered from him at the market rates whichever is higher.
27. The contractor should arrange at his own cost necessary tools and plants, machines, concrete Mixer & vibrators and other machineries such as pumps etc. required for the execution of the work and the rates quoted should be inclusive of the running charges of such plants and cost of consumables.
28. The tenderers are required to go through each clause of P.W.D., From No. P-1 carefully in addition to clause mentioned herewith before tendering.
29. No part of the contract shall be sub-let without written permission of the BDO, JALESWAR BLOCK., Balasore or transfer made by power of attorney to others to receive payment on contractor's behalf.
30. If further necessary information is required, the BDO, JALESWAR BLOCK., Balasore will furnish such, but it must be clearly understood that the tenders must be received in order and according to instructions.
31. Cement shall be used in bags and weight of one cubic meter of cement being taken at 41, 42 quintals.
32. No contractor will be permitted to furnish their tenders in their own manuscript papers.
33. Every tenderer is expected before quoting his rates to inspect the site of proposed work. He should also inspect the quarries and satisfy himself about the quality. Availability of materials medical aids, labour and food stuffs etc, and the rates should be inclusive of all those items of work. In every case the materials must comply with the relevant specifications and samples of stones, metals, chips etc for approval of the Engineer- in- Charge/ BDO, JALESWAR BLOCK., Balasore.
34. Government will not however after acceptance of contract rate pay any extra charge for lead or any other reasons in case the contractor is found later on to have misjudged the materials available.

Signature of the Contractor

J. Rout
18. 07. 23
BDO, JALESWAR BLOCK, Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore

E-mail: ori-jaleswar@gmail.com

35. All fittings for doors and windows if supplied by the Contractor should be of best quality and should be approved by the Engineer –in-charge / BDO, JALESWAR BLOCK., Balasore.
36. The tender's containing extraneous conditions not covered by the tender call notice are liable for rejection.
37. All the tenders received will remain valid for a period of fifteen days from the date of receipt of tenders. The period of validity can also be extended if agreed to by the Department and the contractor.
38. Letters ect. found in the tender box raising or lowering rates or dealing with any point in connection with the tender will not be considered.
39. All reinforced cement concrete works in lintels, columns, beams, chajja, roof slab and other such works should be finished smooth and no extra charges for plastering if required by the department.
40. The tenderer shall bear cost of various incidental sundries and contingencies necessitated by the work falling within the following similar categories.
 - a). Rent, royalties and other charges of materials octroi duties all other taxes including sales tax, ferry/tools conveyance charge and other cost on account of land and building including temporary building required by the tenderer for collection of materials storage housing of staff or other by the tenderer for purpose of work . No rent will however be payable to Government for temporary occupation of land owned by Government at the site of the work.
 - b). Labourers camp or huts necessary to a suitable scale including conservancy and sanitary arrangements therein to the satisfaction of the local health authorities.
 - c). Suitable water supply including pipe water supply when ever available for the staff and the labour as well as for the work.
 - d). Fees and duties levied by the Municipal Canal or Water supply authorities.
 - e). Suitable equipments and wearing apparatus for labour engaged in risky operations.
 - f). Suitable fencing, barriers, signals including paraffin and electric signals where necessary at works and approaches in order to protect the public and employee from accidents.
 - g). Compensation including cost of any suit for injury persons or property due to neglect of any major precautions and also sums which may become payable due to operation of Workmen's Compensation Act.

Signature of the Contractor

P. Rout
18 . 07 . 23
BDO, JALESWAR BLOCK, Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore

E-mail: ori-jaleswar@gmail.com

- h). The contractor has to arrange adequate lighting arrangements for night work however necessary at his own cost.
- i). The contractor has to arrange all the building materials including equipments required for undertaking under reamed piles foundation for starting the work.
41. 3% (Three percent) of gross amount of the bill will be deducted towards income tax from the contractor's bills.
42. Where it will be found necessary by the department, the Officer-in-charge of the work shall issue an order book to the contractor to be kept at the site of the work with pages serially numbered order regarding the work whenever necessary are to be entered in this book by the BDO, JALESWAR BLOCK., Balasore/Engineer- in charge of work with their dated signature and duly noted by the contractor or his authorized agent, with their dated signatures. Order entered in this book and noted by the contractor's agent shall be considered to have been duly given to the contractor for following the instructions of the department. The order book shall not be removed from the site of work with out permission of the BDO, JALESWAR BLOCK., Balasore and to be submitted the Engineer-in-charge / BDO, JALESWAR BLOCK., Balasore every month.
43. Over and above to these conditions the terms and conditions and rules and regulations as laid down or Detailed Standard Specifications of Odisha P.W.D. Code are also binding.
44. Under no circumstance interest is chargeable for the dues or additional dues, if any payable for the work.
45. Item where rates quoted by the tenderers are less than 15% below the current schedule or rates / estimated rates the differential cost between estimated amount and the tender amount shall be withheld till the completion of such items having low rates.
46. The date of issue of the notice to the contractor to attended of the office BDO, JALESWAR BLOCK., Balasore for signing the agreement shall be treated as the date of commencement of work .

Signature of the Contractor

P. Rout
18. 07. 23

BDO, JALESWAR BLOCK, Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

TENDER CALL NOTICE

3509
Advt. No. / Civil/ ,Bls. Of 2023-24.

Date. 18/07/2023

Sealed Tenders (Percentage Rates) in conformity with the DTCN are invited from the "B"&"A" and 'D'&'C' Class Contractors registered with the State Govt. For Execution of works under BDO, Jaleswar Block, Balasore. The tender documents(DTCN & BOQ) can be obtained from district NIC website (www.balasore.nic.in) from Dt. 18.07.2023 to 31.07.2023 till 5p.m. The tenders will received up to Dt. 31.07.2023 till 5p.m. and address to Office of the BDO, Jaleswar , Balasore through Registered post/ Speed Post/ Courier service only. The incomplete Bid in any form is liable for rejection. The detail terms and conditions can be downloaded at NIC Website (www.balasore.nic.in).

P. Rout
18.07.23
BDO, Jaleswar Block
Balasore





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

TENDER CALL NOTICE

Advt. No. ³⁵⁰⁹ / Civil/ ,Bls. Of 2023-24.

Date. / 8 / 07 / 2023.

Sealed Tenders (Percentage Rates) in conformity with the DTCN are invited from the "B"&"A" and 'D'&'C' Class Contractors registered with the State Govt. For Execution of works under BDO, Jaleswar Block, Balasore. The tender documents(DTCN & BOQ) can be obtained from district NIC website (www.balasore.nic.in) from Dt. 14.07.2023 to 24.07.2023 till 5p.m. The tenders will received up to Dt. 24.07.2023 till 5p.m. and address to Office of the BDO, Jaleswar , Balasore through Registered post/ Speed Post/ Courier service only. The incomplete Bid in any form is liable for rejection. The detail terms and conditions can be downloaded at NIC Website (www.balasore.nic.in).

P. Rout
18.07.23
BDO, Jaleswar Block
BALASORE





OFFICE OF THE BLOCK DEVELOPMENT OFFICER, JALESWAR BLOCK, Balasore
E-mail: ori-jaleswar@gmail.com

To,

The District Informatic Officer, NIC ,Balasore

Sub:- Requested to publish the Tender Call Notice, BOQ and DTCN, in district web site portal for wide circulation.

Sir,

Reference to the subject cited above I am here by requested to publish the above said tender notice in district web site portal for wide publication.

Your, faithfully

A. Rout

18.07.23

BDO, Jaleswar Block

Balasore

**DRAWING & DESIGN FOR CONSTRUCTION OF ICT & SMART
LEARNING FACILITY CENTRE**

**"SUMMARY OF CONSTRUCTION OF ICT &
SMART LEARNING FACILITY CENTRE"**

SL. No.	Description of Item		TOTAL
1	CIVIL	1218794	1218794

**DETAILED ESTIMATE FOR CONSTRUCTION OF ICT &
SMART LEARNING FACILITY CENTRE**

SL NO	DESCRIPTION	QTY	UNIT	RATE	Amount
1	Excavation in ordinary soil for foundation including dressing and levelling the bed and depositing the soil within 50m. initial lead and 1.5m. initial lift including rough dressing and breaking clods to maximum 5cm. to 7cm. and laying in layer	33.84	Cum	199.57	6753.45
2	SAND FILLING - Supplying and filling in foundation trenches and plinth, ditches with sand well watered and rammed in layers not exceeding 23 cm. In depth with all lead and lift including cost, conveyance, loading, unloading, royalties and taxes of all materials, cost of all labour, sundries, T&P required for the work etc. complete in all respect as directed by the Engineer-in-Charge. Measurement will be taken on finished compacted section only).	15.57	Cum	419.76	6535.66
3	Filling Foundation and plinth with excavated ordinary soil etc. complete.	17.81	Cum	92.47	1646.65
4	Providing and laying P.C.C. (1:4:8) in foundation trench and below flooring using 40mm down graded crusher broken HG Metal, including compaction, curing including cost of all materials and labour etc. complete as per direction of Engineer- In -Charge.	7.35	Cum	4481.60	32935.28
5	ANTI TERMITE TREATMENT- Supplying, diluting and preparing chemical emulsions like chlorpyrifos or other chemical approved by central insecticides board as directed spraying the mixture uniformly by sprayer as pre-constructional anti termite treatment and creating a chemical barrier under and around the wall trenches, basement, excavation, top surface of the plinth filling, junctions of wall and floor along with external perimeter of the building complete as per IS:6313/1981 (Part ii) and as per the direction of the engineer in charge	43.52	sqm	35.00	1523.20

	including all cost and material, labour, taxes etc all complete				
6	Fly ash brick masonry using Fly ash bricks of size 25cm x 12 cm x 8 cm having crushing strength not less than 75 kg Per Sqr. Cm. In cement mortar of mix (1:6) with cement and screened and washed sharp sand for mortar after immersing the bricks for 6 (six) hours in water before use in foundation, plinth, basement and for ornamental flower beds, plinth moulding and similar such type of works with all necessary projections, splays cutting, circular moulding, corbelling, chamfering, watering and curing etc including cost, conveyance, loading unloading, royalties and taxes of all materials and cost of all labour, sundries, T & P required for the works etc. complete in all respect as directed by the Engineer-in-Charge.	4.49	Cum	4195.42	18816.46
7	R.C.C. work of M20 using 20mm and down graded hard granite crusher broken chips including laying, hosting, centring & shuttering with all cost, conveyance of material etc. complete.				
I	FOUNDATION & PLINTH				
	Footing & Pedestal	3.51	Cum	6125.20	21499.45
	Column Upto plinth	0.38	Cum	6125.20	2296.95
	Plinth beam	1.40	Cum	6492.00	9070.95
II	SUPERSTRUCTURE				
	Column in superstructure				
	GF	2.03	Cum	11467.29	23221.26
	Roof beam				
	GF	6.03	Cum	11467.29	69101.89
	Lintel				
	GF	0.97	Cum	9987.51	9647.93
	Roof slab				
	GF	16.15	Cum	9613.99	155227.48
	Chajja				
	GF	5.81	Sqm	718.20	4175.61
8	Providing precast RCC jali 50 mm thick fixing in position with cement mortar 1:3 as per required design and pattern .The rate includes cost of all materials labour conveyance loading and unloading, complete as per direction of the engineer in charge	5.00	sqm	689.00	3445.00
9	Supply M.S. reinforcement for R.C.C. work including cutting, bending, binding and tying the grills and placing in position including cost of reinforcement and binding wire 18 to 20 gauge.				
a	GF	34.33	Qntl.	9100.09	312437.80
10	Fly ash brick masonry using Fly ash bricks of size 25 cm. x 12 cm. x 8 cm. having crushing strength not less than 75 kg. Per Sqr. Cm. in cement mortar of mix (1:6) with cement after immersing the bricks for 6 (Six) hours in water before use in superstructure including splays cutting, circular moulding, corbelling, chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading and unloading, royalties and taxes of all materials and cost of all labour, scaffolding, sundries, T&P required for the works etc. complete in all respect as directed by the				

Engineer-in-charge.		12.97	Cum	4228.42	54826.75
10.A	GF Fly ash brick masonry using Fly ash bricks of size 25 cm x 12 cm x 8 cm having crushing strength not less than 75 kg. Per Sq. Cm in cement mortar of mix (1:4) with cement after immersing the bricks for 4 (FOUR) hours in water before use in superstructure including splaya cutting, circular moulding, corbelling, chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading and unloading, royalties and taxes of all materials and cost of all labour, scaffolding, sundries, T&P required for the works etc. complete in all respect as directed by the Engineer-in-charge.	1.51	Cum	4416.42	6679.84
11	12 m.m thick cement plaster in cement mortar of mix (1:6) in all floors at all height using screened & washed sharp river sand for mortar with approved quality of cement, finished smooth to the even surface of the brick masonry walls after racking out the joints properly, providing grooves wherever necessary including cost, conveyance, loading, unloading, stacking, royalties and taxes of all Materials, cost of all Labour, T&P, Sundries, Scaffolding, Watering, Curing, Rounding of corners etc. required for the work complete etc. as directed by the Engineer-in-charge.				
a	GF & Parapet	63.30	Sqm	150.98	9556.28
12	16 m.m thick cement plaster in cement mortar of mix (1:6) in all floors at all height using screened & washed sharp river sand for mortar with approved quality of cement, finished smooth to the rough surface of the brick masonry walls after racking out the joints properly, providing grooves wherever necessary including cost, conveyance, loading, unloading, stacking, royalties and taxes of all Materials, cost of all Labour, T&P, Sundries, Scaffolding, Watering, Curing, Rounding of corners etc. required for the work complete etc. as directed by the Engineer-in-charge.				
a	GF	80.30	Sqm	214.40	17215.25
13	2.0cm. thick grading plaster (1:4) on roof slab with 2% water proofing compound on the top of roof terrace of all floors. Size on new work including cost of all labour, materials with all taxes, lead, T & P etc all complete.	107.64	Sqm	308.99	33259.88
14	Distemper paint Finishing walls with water proofing cement paint of approved shade on new work of two coats to give an even shade including cost of paint etc, all complete as per direction of engineer in charge	63.30	Sqm	124.51	7880.86
15	Providing two coats of weather coat over a coat of Priming (with water based Exterior Primer) of approved quality and colour, using the required quantity of paint as specified by the manufacturer to give all external surface over the finished plaster surface including watering the surface before applying and curing for the required period as directed by the Engineer-in-charge including cost of all materials with taxes and transportation, all labour, scaffolding, sundries, T&P etc. complete.	80.30	Sqm	132.20	10615.00

	Providing and laying Vitrified tiles in CM 1:1 using 8 to 10 mm thick at corridor areas	80.24	Sqm	1126.65	90402.40
17	Fixing of interlocking blocks (PAVER STONE) of 75mm thick of approved pattern & shade over 75mm thick bed of sand.				
a	GF	4.00	Sqm	1325.20	5300.80
18	Supplying, fitting and fixing M.S. grill made out of structural steel, flats, plates, bars, conforming to IS specification for windows, ventilators etc. as per drawing and design, fixed to walls with clamps including 1 priming coat with approved metal primer and making good to all damages in walls and floors etc. including cost of all materials, labour, conveyance, taxes, royalties, scaffolding, sundries, tools and plants, etc., complete as per the direction of the Engineer-in-charge.	148.50	kg	95.36	14160.96
19	Providing and painting two coats with synthetic enamel paint of approved quality and approved shade conforming to ISI on steel work to give an even shade in all floors at all height over a coat of primer of approved quality and shade including sand papering and making the surface smooth with cost, conveyance, loading and unloading, and taxes of all materials, cost of all labour, sundries, T&P, scaffolding etc. required for the work and complete in all respect as directed by Engineer-in-charge.	14.85	Sqm	178.56	2651.62
20	MS WINDOW -Providing and fixing 1mm thick M.S. sheet on both sides of the door with frame of 40x40x6 mm angle iron and 3 mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. (Using M.S. angels 40x40x6 mm for diagonal braces), including all cost of material, labour, T&P, taxes realities etc, all complete as per the direction of Engineer in charge.	90.24	SQM	2417.91	218192.20
a	Ground Floor	8.50	sqm	3420.83	29077.08
21	PLINTH PROTECTION- Making plinth protection 50mm thick of cement concrete 1:3:6 (1cement:3 coarse sand : 6graded stone aggregate 20mm nominal size) over 75mm bed by dry brick ballast 40mm nominal size well rammed and consolidated and grouted with fine sand including finishing the top smooth	90.24	Sqm	450.35	40639.58
				Total	1218793.52
	TOTAL VALUE			Say	1218794.00


[Handwritten signature]

[Handwritten mark]

Annexure B

4400

14100

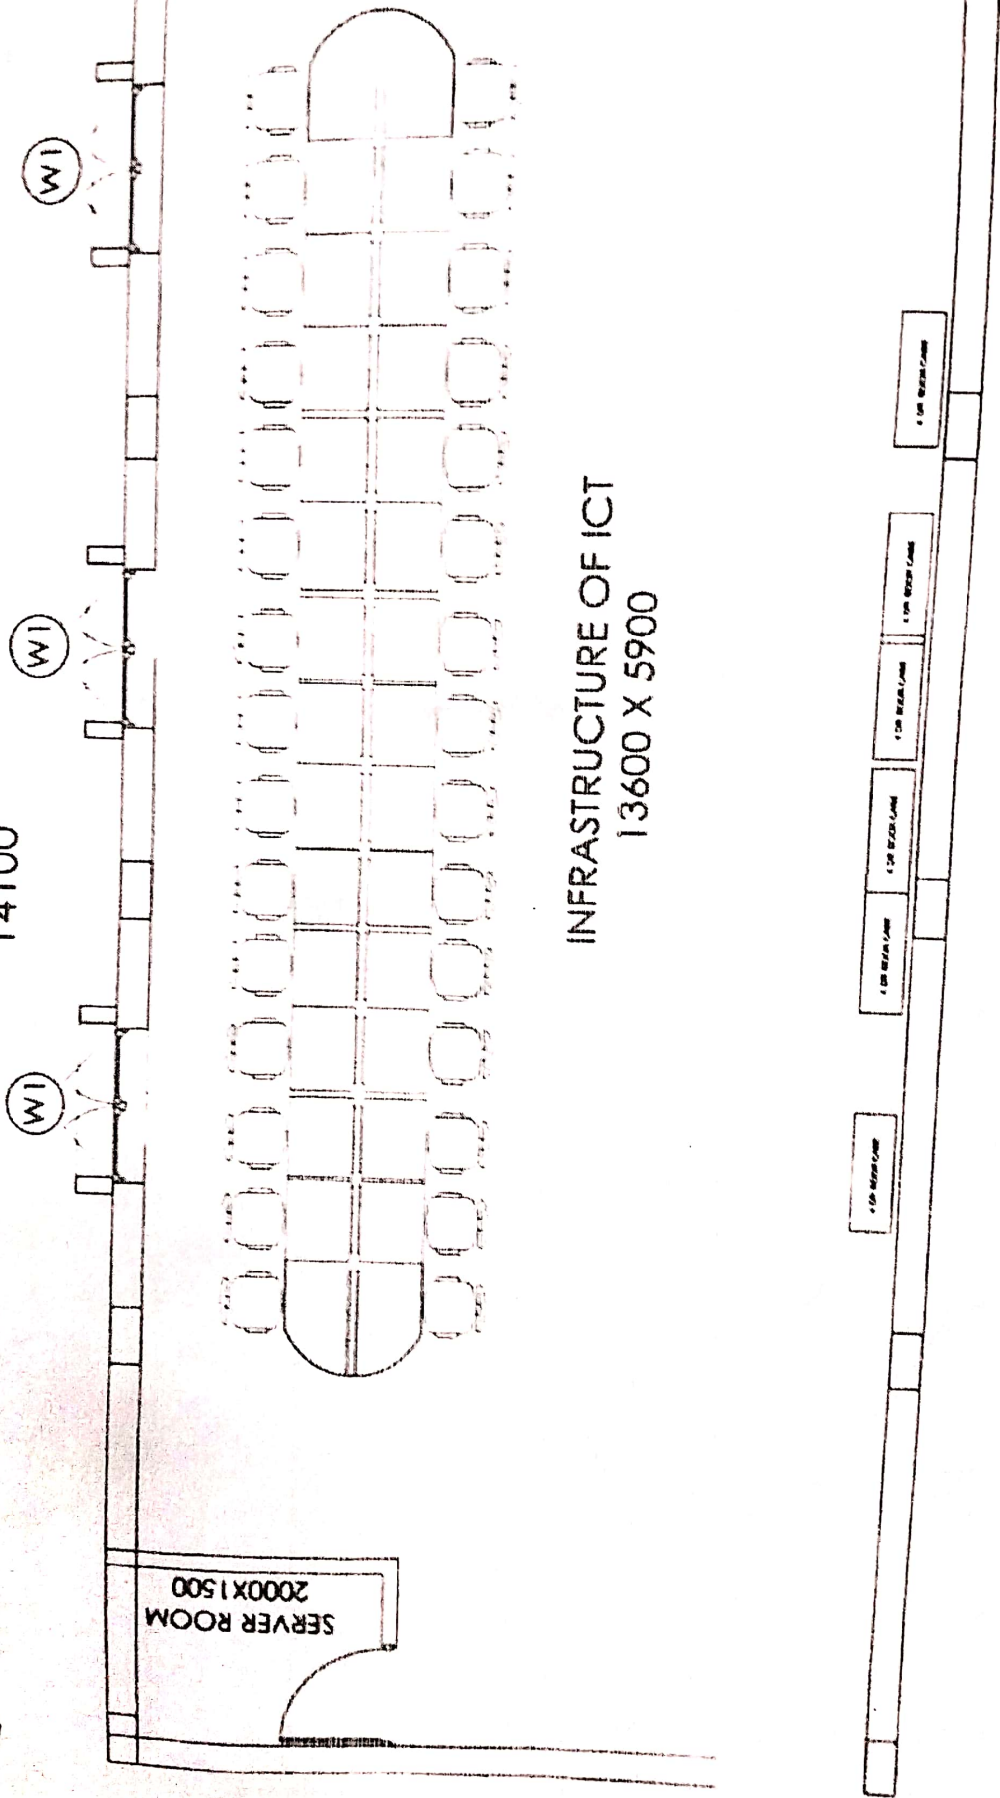

INFRASTRUCTURE OF ICT
13600 X 5900

[Signature]
JERISON